


DuraForm® HST Composite



BDSYSTEMS™

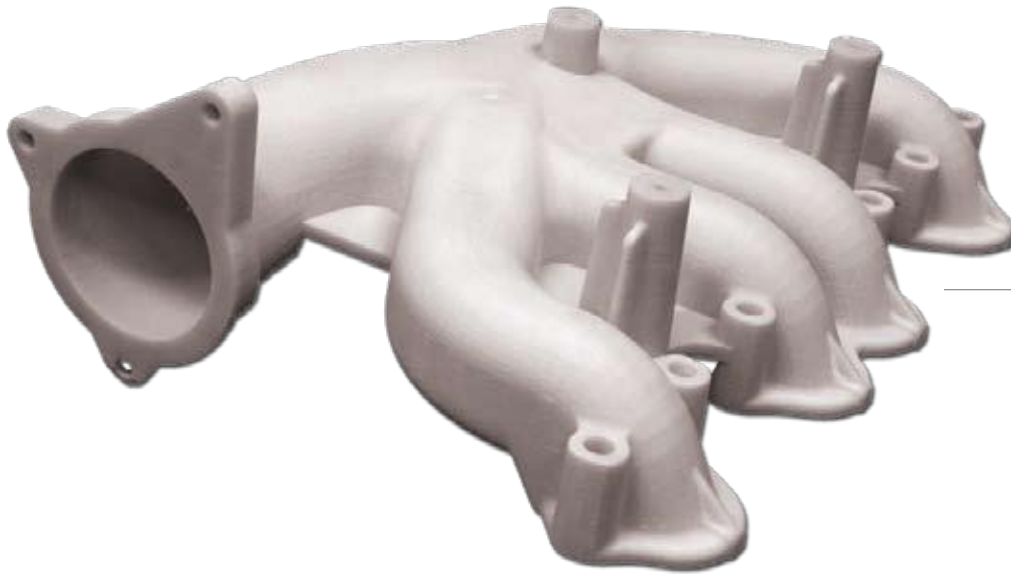


Manifold built with stiff and durable DuraForm® HST Composite.

Applications

- Functional prototypes and end-use parts that require high stiffness and/or elevated thermal resistance
- Typical Applications include:
 - UAV structural components
 - Housings and enclosures
 - Impellers
 - Connectors
 - Consumer sporting goods

Features

- High specific stiffness
- Elevated temperature resistance
- Anisotropic mechanical properties just like fiber-filled, injection molded materials
- Non-conductive and RF transparent
- Easy-to-finish surface

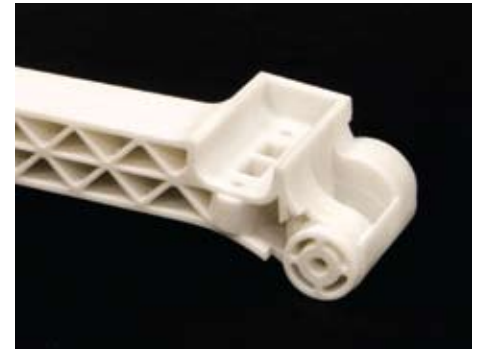

Benefits

- Functional prototypes can be tested in "real life" environments
- Complex end-use parts can be economically manufactured in low-to-medium volumes
- Excels in load-bearing applications at higher temperatures
- Attractive surface finish



DuraForm® HST Composite

For use with all Sinterstation® Pro and Sinterstation® HiQ™ series SLS® Systems

Technical Data

General Properties

Measurement	Condition	Metric		U.S.	
Specific Gravity	ASTM D792	1.20 g/cm ³		1.20 g/cm ³	

Mechanical Properties

Measurement	Condition	Metric		U.S.	
		X-direction	Z-direction	X-direction	Z-direction
Tensile Strength, Yield	ASTM D638	N/A*		N/A*	
Tensile Strength, Ultimate	ASTM D638	48-51 MPa	31-34 MPa	7050-7350 psi	4500-4900 psi
Tensile Modulus	ASTM D638	5475-5725 MPa	2900-3000 MPa	795-831 ksi	421-434 ksi
Elongation at Yield	ASTM D638	N/A		N/A	
Elongation at Break	ASTM D638	4.5 %	2.7 %	4.5 %	2.7 %
Flexural Strength, Yield	ASTM D790	N/A		N/A	
Flexural Strength, Ultimate	ASTM D790	83-89 MPa	64-68 MPa	12000-12900 psi	9275-9850 psi
Flexural Modulus	ASTM D790	4400-4550 MPa	2625-2825 MPa	638-660 ksi	381-410 ksi
Hardness, Shore D	ASTM D2240	75		75	
Impact Strength (notched Izod, 23 °C)	ASTM D256	37.4 J/m		0.7 ft-lb/in	
Impact Strength (unnotched Izod, 23 °C)	ASTM D256	310 J/m		5.8 ft-lb/in	
Gardner Impact	ASTM D5420	5 J		3.7 ft-lb	

Thermal Properties

Measurement	Condition	Metric		U.S.	
		X-direction	Z-direction	X-direction	Z-direction
Heat Deflection Temperature (HDT)	ASTM D648 @ 0.45 MPa @ 1.82 MPa	184 °C 179 °C	178.8 °C 135 °C	363 °F 355 °F	354 °F 276 °F
Coefficient of Thermal Expansion	ASTM E831 @ 0 - 50 °C @ 85 - 145 °C	138.3 µm/m-°C 267.2 µm/m-°C	102.7 µm/m-°C 184.2 µm/m-°C	76.8 µin/in-°F 148.4 µin/in-°F	57 µin/in-°F 102.3 µin/in-°F
Specific Heat Capacity	ASTM E1269	1.503 J/g-°C		0.359 BTU/lb-°F	
Flammability (3 mm)	UL 94	HB		HB	

Electrical Properties

Measurement	Condition	Metric	U.S.
Volume Resistivity	ASTM D257	6.7 x 10 ¹⁵ ohm-cm	6.7 x 10 ¹⁵ ohm-cm
Surface Resistivity	ASTM D257	5.2 x 10 ¹⁵ ohm	5.2 x 10 ¹⁵ ohm
Dissipation Factor, 1 KHz	ASTM D150	0.028	0.028
Dielectric Constant, 1 KHz	ASTM D150	3.14	3.14
Dielectric Strength	ASTM D149	18.5 kV/mm	470 kV/in

* N/A = Not Applicable

Data was generated by building parts using 100% virgin powder under typical default parameters. DuraForm® HST Composite was processed on a Sinterstation® HiQ™ + HS SLS® System at 25 watts laser power, 10 m/sec [400 inches/sec] scan speed, and a powder layer thickness of 0.1 mm [0.004 inches].



3D Systems Corporation
333 Three D Systems Circle
Rock Hill, SC 29730 U.S.A.

Tel: +1 803.326.4080
Toll-free: 800.889.2964
Fax: +1 803.324.8810

moreinfo@3dsystems.com
www.3dsystems.com
NASDAQ: TDSC

Warranty/Disclaimer: The performance characteristics of these products may vary according to product application, operating conditions, material combined with, or with end use. 3D Systems makes no warranties of any type, express or implied, including, but not limited to, the warranties of merchantability or fitness for a particular use.

© 2008 by 3D Systems, Inc. All rights reserved. Specifications subject to change without notice. HiQ™ is a trademark, and the 3D logo, DuraForm®, Sinterstation® and SLS® are registered trademarks of 3D Systems, Inc.